

S3M pitch=3mm



长度/公差 : $\pm 0.5\text{mm/m}$

Length/Tolerance : $\pm 0.5\text{mm/mm}$

厚度/公差 : $\pm 0.2\text{mm}$

Thicknedd/Tolerance: $\pm 0.2\text{mm}$

聚氨酯开口带/接驳带 PU OPEN/JOINTED BELTS

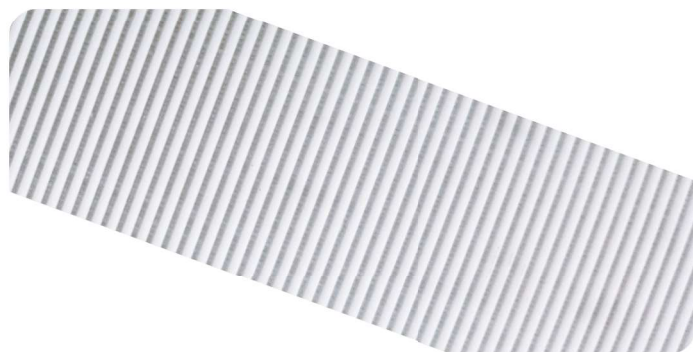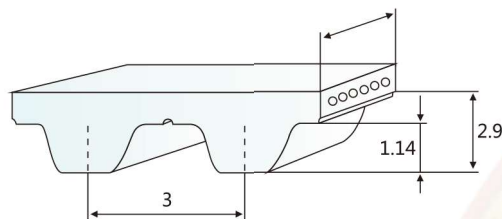

- 颜色/Colours : 白色/White、黑色/Black
- 线芯/Cords : 钢丝/Steel、尼龙/Nylon、凯夫拉线/Kevlar
- 最大宽度/MAX Width : 100mm
- 标准长度/Standard length : 100m

附加选择 Available Options

- 加胶 / Covering



S5M pitch=5mm


长度/公差 : $\pm 0.5\text{mm/m}$

Length/Tolerance : $\pm 0.5\text{mm/mm}$

厚度/公差 : $\pm 0.2\text{mm}$

Thicknedd/Tolerance: $\pm 0.2\text{mm}$

聚氨酯开口带/接驳带 PU OPEN/JOINTED BELTS

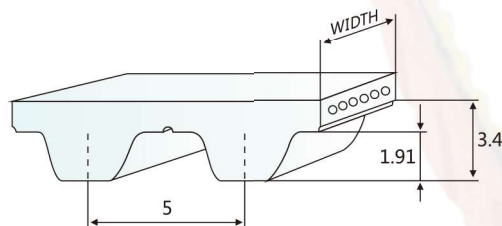

- 颜色/Colours : 白色/White、黑色/Black
- 线芯/Cords : 钢丝/Steel、凯夫拉线/Kevlar
- 最大宽度/MAX Width : 100mm
- 标准长度/Standard length : 100m

附加选择 Available Options

- 齿面包布 / NFT
- 背面包布 / NFB
- 双面包布 / NFT+NFB
- 加胶 / Covering

