

S8M pitch=8mm


长度/公差 : $\pm 0.5\text{mm/m}$

Length/Tolerance : $\pm 0.5\text{mm/mm}$

厚度/公差 : $\pm 0.2\text{mm}$

Thicknedd/Tolerance: $\pm 0.2\text{mm}$

聚氨酯开口带/接驳带 PU OPEN/JOINTED BELTS

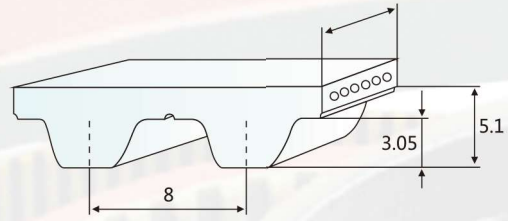

- 颜色/Colours : 白色/White、黑色/Black
- 线芯/Cords : 钢丝/Steel、凯夫拉线/Kevlar
- 最大宽度/MAX Width : 150mm
- 标准长度/Standard length : 100m

附加选择 Available Options

- 齿面包布 / NFT 
- 背面包布 / NFB 
- 双面包布 / NFT+NFB 
- 加胶 / Covering 
- 双面齿 / Double sides 
- 一体导条/ Ontology conducting bar



S14M pitch=14mm


长度/公差 : $\pm 0.5\text{mm/m}$

Length/Tolerance : $\pm 0.5\text{mm/mm}$

厚度/公差 : $\pm 0.4\text{mm}$




Thicknedd/Tolerance: $\pm 0.4\text{mm}$

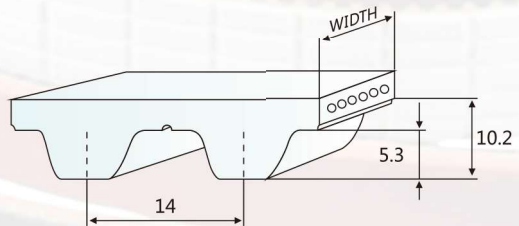聚氨酯开口带/接驳带 PU OPEN/JOINTED BELTS



- 颜色/Colours : 白色/White、黑色/Black
- 线芯/Cords : 钢丝/Steel、凯夫拉线/Kevlar
- 最大宽度/MAX Width : 150mm
- 标准长度/Standard length : 100m

附加选择 Available Options

- 齿面包布 / NFT 
- 背面包布 / NFB 
- 双面包布 / NFT+NFB 
- 加胶 / Covering 